

## Features

- *Bi-Conical Antenna for EMC /EMI Testing*
- *Frequency Range : 30 – 300 MHz*
- *Impedance - 50Ω (Nominal)*
- *Precision construction*
- *Material - Aluminium*
- *Individual calibration as per ANSI 63.5 / SAE ARP 958*



## Description

The ANB-0230 is a bi-conical dipole antenna, specially designed for EMC/EMI compliance testing in accordance with ANSI/CISPR/SAE ARP test standards. The ruggedized aluminium - cage dipole construction is precision manufactured and tested to conform to the requirements of the standards, with respect to dimensions, antenna factor etc.

An integrated low loss 200:50Ω bal-un, inside the antenna ensures a good impedance match between the antenna elements and the end connector, over a wide range of frequencies.

The antenna is designed for 30 – 300 MHz, but is usable down to 20 MHz

The antenna can be used for Radiated Immunity, Shielding Effectiveness (SE) and other electro-magnetic (EM) field Tx applications.

## Specifications\*

Model	<b>ANB-0230</b>
Frequency Range	<b>30 – 300 MHz</b>
Impedance	<b>50 Ω</b>
VSWR	<b>&lt;=2.5:1 Typical</b>
Antenna Factor (dB/m)	<b>7 – 25 (dB/m)</b>
Symmetry	<b>&lt; 1dB</b>
Max input Power	<b>1000 watt</b>
Polarisation	<b>Linear (V/H)</b>
Connector Type	<b>N female</b>
Dimensions	<b>1320 X 865 mm</b>
Weight	<b>2.0 Kg</b>
Environmental	<b>-20°C to +40°C</b>
Mounting	<b>22mm diameter tube</b>
Applications	<b>Radiated Immunity, SE, EM Field Tx Applications</b>

\* Nominal values, subject to change without notice.

## Calibration



Each antenna is individually calibrated (traceable) at an Open Area Test Site as per ANSI 63.5 or SAE ARP 958. 17025 Accredited calibration is available upon request.

## Related Products


MAS\_FG\_03

Modular telescopic non reflective fibre glass mast


#### Typical Conversion Factors of ANB-0230HP Bi-Conical Antenna

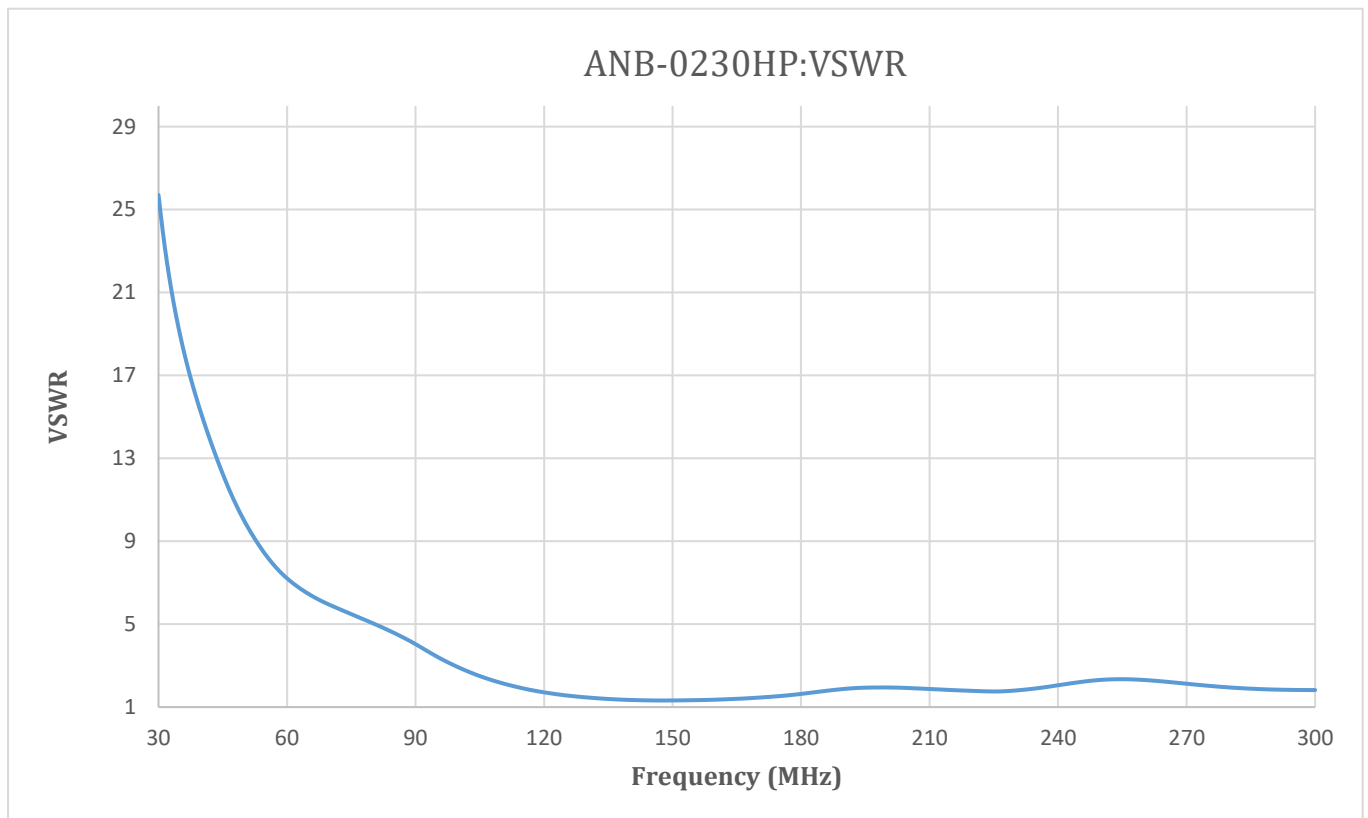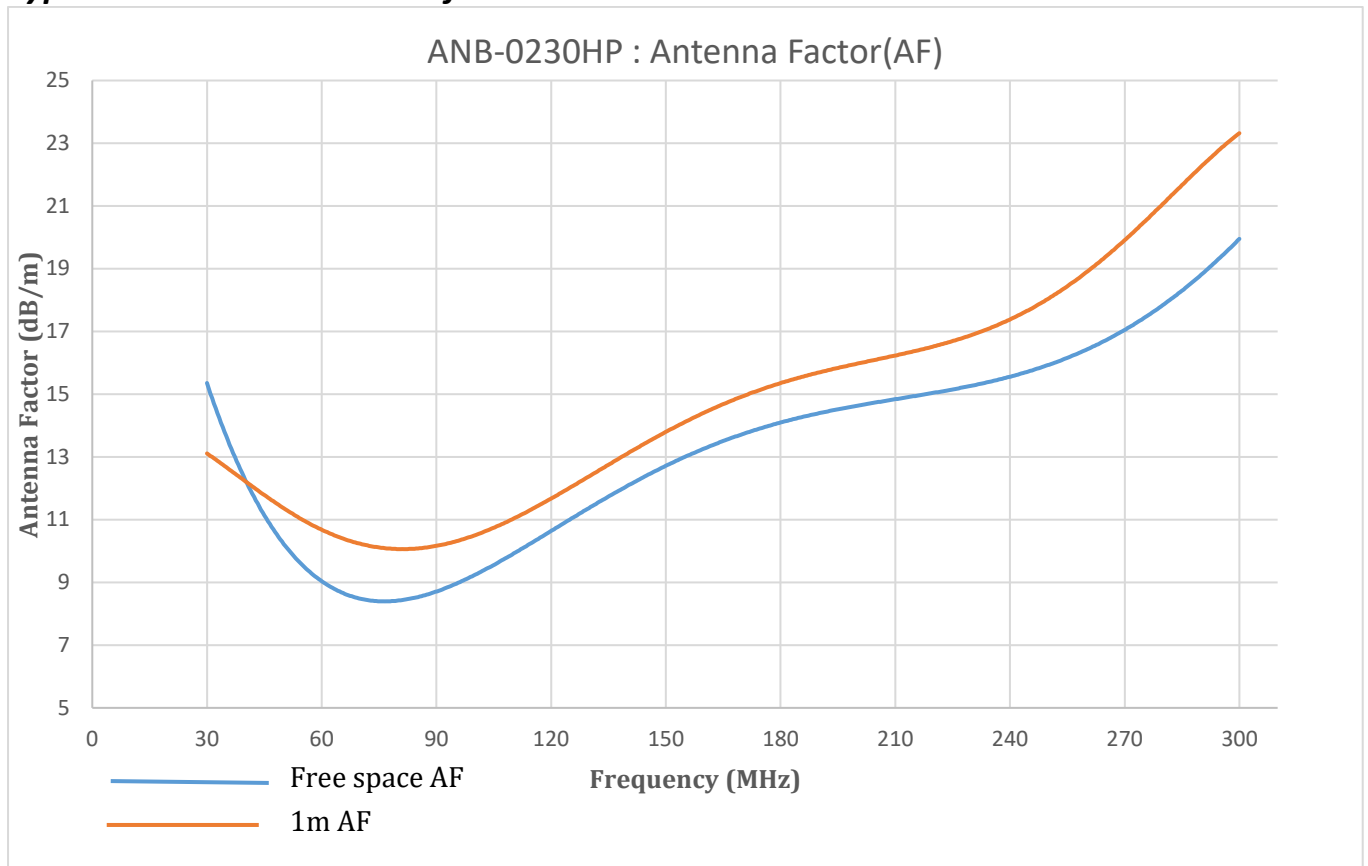

ANB-0230HP Generated Field Strength 3m Tip EUT

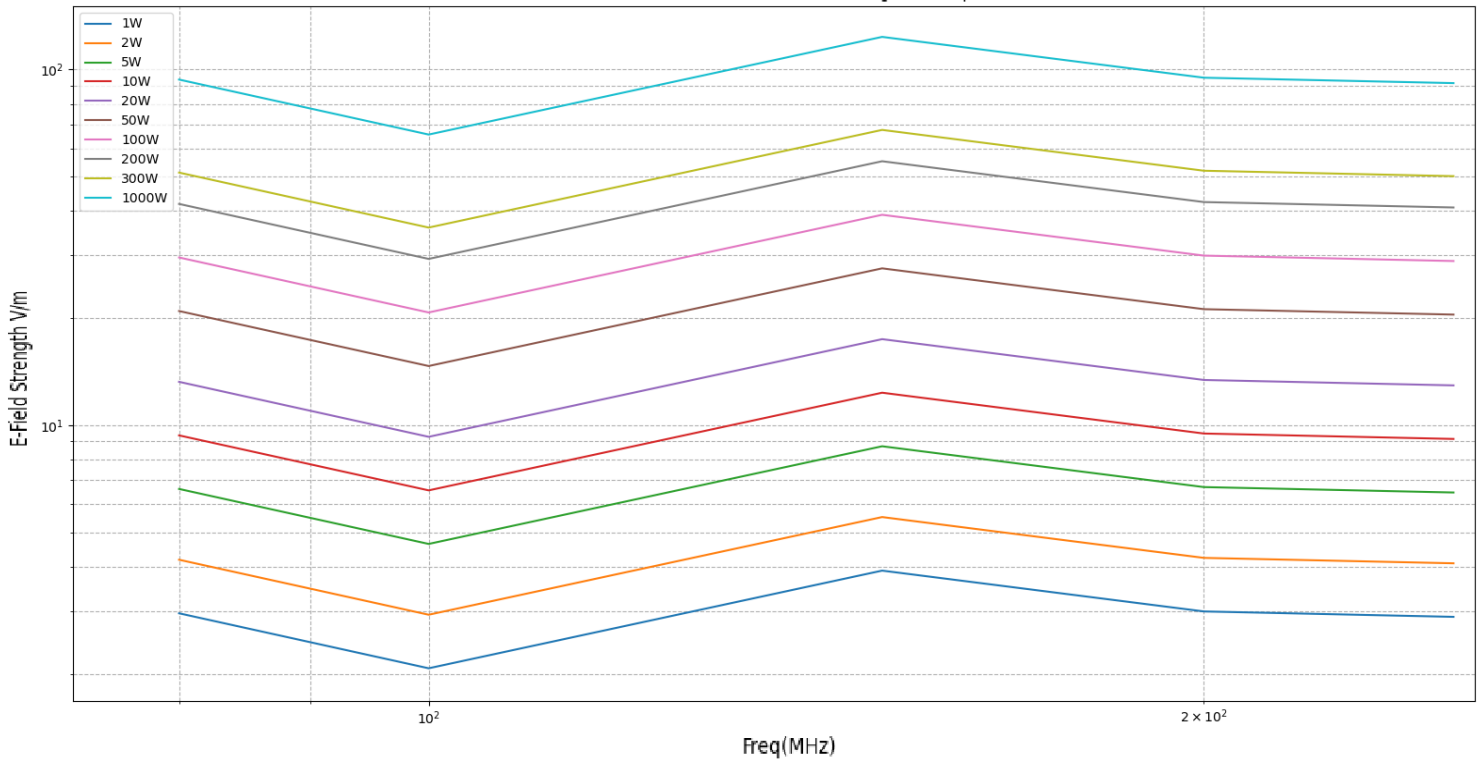

ANB-0230HP Generated Field Strength 1m Tip EUT

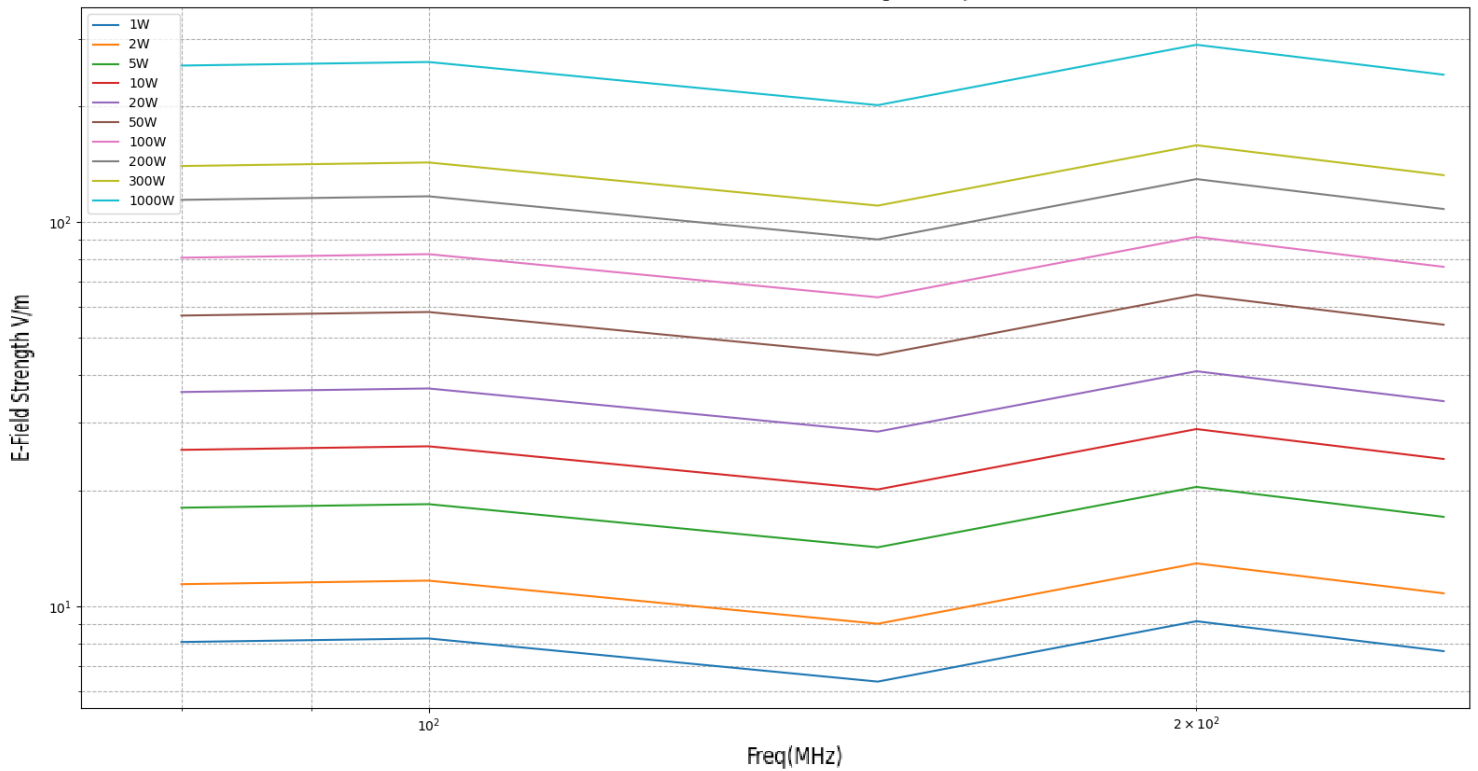

Note : Power indicated is the Forward Power measured at the input to the Antenna connector